


## Mounting Instructions for i<sup>3</sup> Compact DVR/NVR models. (Install First)

**WARNING: By mounting your Compact DVR/NVR unit on the wall, you are effectively voiding the unit's ULc certification.**


Compact chassis dimensions: 16" x 13 ¼" x 5 ¾" (LxWxH) (406.4 mm x 336.55 mm x 146.05 mm)

Each bracket piece is labeled (A, B, C) and the "Up" position is clearly marked to simplify the installation. Please follow the mounting instructions exactly.

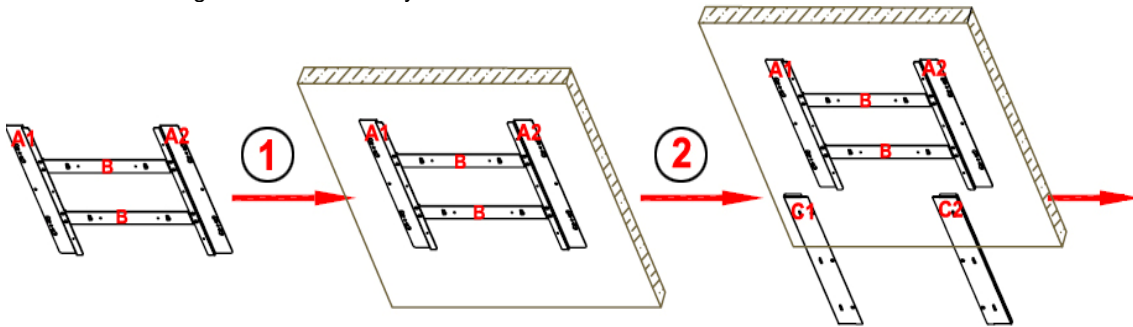

**Step 1.** Mount the "H" bracket onto the wall. The hooks on the bracket pieces labeled **B** must be facing out and up.  
**Note:** Use screws of the appropriate size (not provided).

**Step 2.** Take **C1/C2** and screw on top of the **A1/A2** bracket piece in order to conceal the screws mounted into the wall.  
**Note:** Use 6 (six) provided screws.

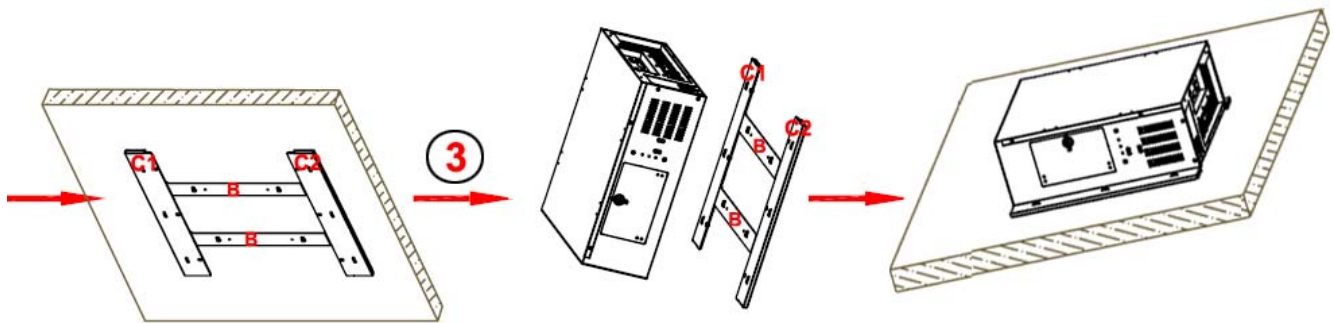

**Step 3.** Lift the Compact chassis and insert the hooks on the bracket pieces marked **B** into the matching openings in the back of the chassis. Lock into position.


### **IMPORTANT:**

When mounting on the wall, mount directly onto the surface that can provide enough support for the Compact DVR/NVR unit to ensure secure and safe installation. Average unit weight - 24.9 lb (11.3 kg).

## Mounting Instructions for i<sup>3</sup> Expansion (Utility) Box. (Install after Compact chassis. See reverse for instructions)

Expansion (Utility) box dimensions: 7" x 13 1/4" x 5 3/4" (LxWxH) (177.8 mm x 336.55 mm x 146.05 mm)

Each bracket piece is labeled (D, E, F) and the "Up" position is clearly marked to simplify the installation. Please follow the mounting instructions exactly.

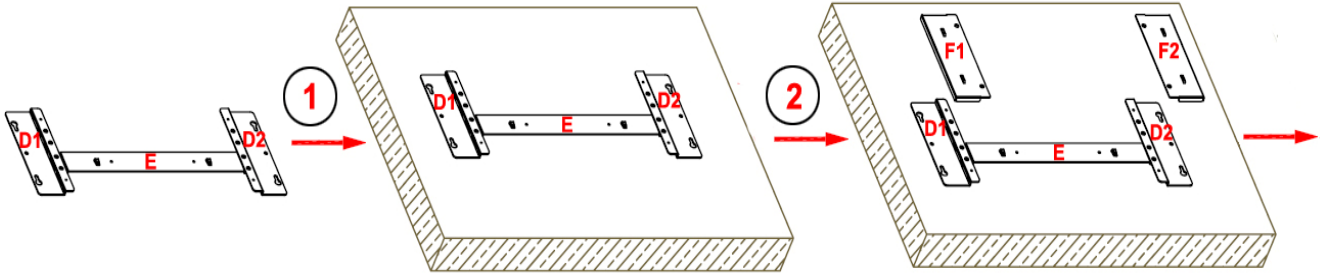


**Step 1.** Mount the "I" bracket onto the wall directly **above** the "H" bracket for Compact DVMS unit (see reverse for instructions). The hooks on the bracket piece labeled **E** must be facing out and up.

**Note:** Use screws of the appropriate size (not provided).

**Step 2.** Take **F1/F2** and screw on top of the **D1/D2** bracket piece in order to conceal the screws mounted into the wall.

**Note:** Use 4 (four) provided screws.

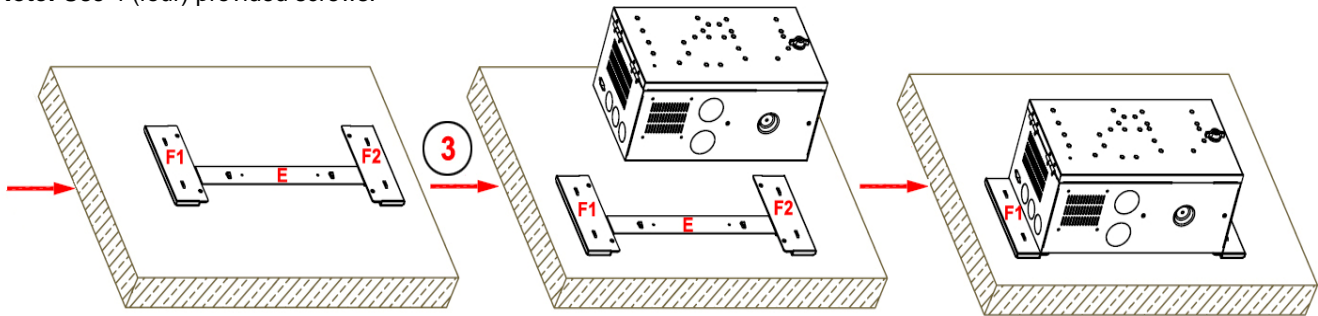

**Step 3.** Lift the Expansion (Utility) Box and insert the hooks on the bracket piece marked **E** into the matching openings in the back of the box. Lock into position.

Open the Expansion Box cover and tighten 2 (two) screws that are attached to the bracket piece marked **E**.

### IMPORTANT:

When mounting on the wall, mount directly onto the surface that can provide enough support for the expansion box to ensure secure and safe installation. Average expansion box weight (empty) – 6.65 lb (3.02 kg).

Please contact technical support at [support@i3international.com](mailto:support@i3international.com) or by phone: 1.877.877.7241 if you have any questions or issues.

i<sup>3</sup> International Inc.  
Technical Support and Services  
1.877.877.7241  
[support@i3international.com](mailto:support@i3international.com)