

August 18, 2017

**Release Announcement: Mo-1 Outdoor Omnidirectional Microphone Release.**

To all of our customers and partners;

i3 International is pleased to announce the release of the Outdoor IP66 omnidirectional line level microphone. Mo-1 microphone features an attractive and durable metal housing that is dust- and waterproof. The microphone has an omnidirectional 5 meter (16 ft) sound pickup radius and built-in Ambient Noise Cancellation for exceptional quality sound.




Mo-1 microphone can be discreetly wall- or ceiling-mounted indoors or outdoors, up to 300 m (1000ft) away from the Annexus camera, for a wide range of applications, including schools, gas stations, transit, and retail.

Mo-1 pairs well with i3's Annexus 63C, Annexus 65RM and 75RM (pending release) cameras.

**Important:** When ordering, make sure to mention that the camera will be used together with Mo-1 microphone for video and **audio** recording

**Using Mo-1 microphone with compatible i3 cameras:**

Connect Mo-1 to the camera's audio terminal according to microphone installation instructions. Then add the camera to the SRX-Pro IP Camera tab by using **Search & Add** command and selecting **IP Video With Audio** option. Once the camera is added and assigned to an SRX-Pro channel, access the camera's Web GUI setup and make sure **Audio In** option is set to **On**.

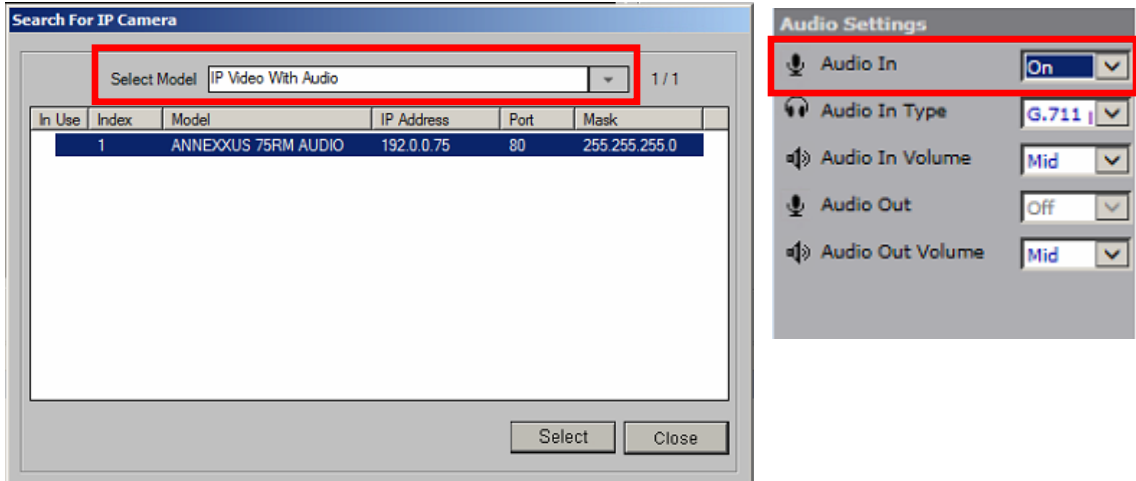

In Hardware setup tab, assign the camera to an SRX-Pro video channel and select **Input 1** in the Audio dropdown to enable audio recording.



**i3 Recommendation:** For best audio performance, set the camera to Continuous recording @ 15fps when using for audio recording.



In addition to the i3 encrypted format, the upcoming SRX-Pro v.6.X release now supports MP4 Video+Audio backup format for added convenience.

### Two-way audio communication using Mo-1.

For two-way audio communication, connect both Mo-1 microphone and an **external speaker** to your Ax63C, Ax65RM or Ax75RM (pending release) camera. Add the camera to the SRX-Pro Server and configure it for audio recording as described above.

To initiate two-way audio communication between SRX-Pro Server and the audio-enabled camera, use



the **2-way Audio** icon on the SRX-Pro main screen.

To initiate two-way audio communication between VPC remote site and the audio-enabled camera, bring the channel into full-screen mode, then click and hold the microphone icon to speak. Release to listen.



Please contact technical support if you have any questions or issues.

Email: [support@i3international.com](mailto:support@i3international.com)

Tel.: 1.877.877.7241

Live Chat: <http://i3chat.i3international.com/chat>