

Re: Annexus Configuration Tool v1.5.2.1 Release Notice

To all of our customers and partners;

This bulletin is the official notice of the release of Annexus Configuration Tool v.1.5.2.1.

v.1.5.2.1 Improvements include:**New Features:**

- Support new cameras: Annexus 98

Improvements:

- Support new password rule for Annexus 78 and Annexus 98 cameras (firmware v.5.4.5 and above)
- Set Password to multiple Ax78 and Ax98 cameras at-a-time


Limitations:

Video Settings changes for multi-input cameras (Ax78, Ax98) is not supported via ACT. To make changes to the camera settings, connect to the web GUI of the camera through Internet Explorer.

Setting Password on an Ax98 camera:

To activate and secure access to your camera, you must first set the password for the administrative user account (i3admin). Your camera will remain **inactive** and **inaccessible** until administrative password is set.

1. Connect your Annexus 78R/98 camera to the Gigabit switch.
2. On your i3 NVR, launch i3 Annexus Configuration Tool (ACT) v.1.5 or higher.
You can download and install the latest ACT installation package from i3 website:
<https://i3international.com/download>
3. In the model drop-down list, select ANNEXXUS 78 or 98. Security status will say “inactive”.

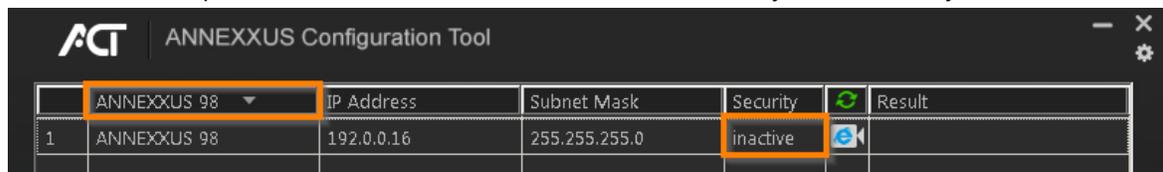

4. Select one or more cameras in the list.
5. In the Global Camera Settings, click **Set Password**.

**CONTACT**

www.i3international.com
Toll free: 1.866.840.0004
Tel: 416.261.2266
Fax: 416.759.7776


CANADA

i3 International Inc.
780 Birchmount Rd,
Unit 16, Toronto, ON,
M1K 5H4

USA

i3 America (Nevada) Inc.
4450 Witmer Industrial
Estates, Unit 4, Niagara
Falls, NY 14305

- In the *Set password* window, enter the new password in the **Password** and **Confirm Password** fields. Follow secure password guidelines. Click **OK**.

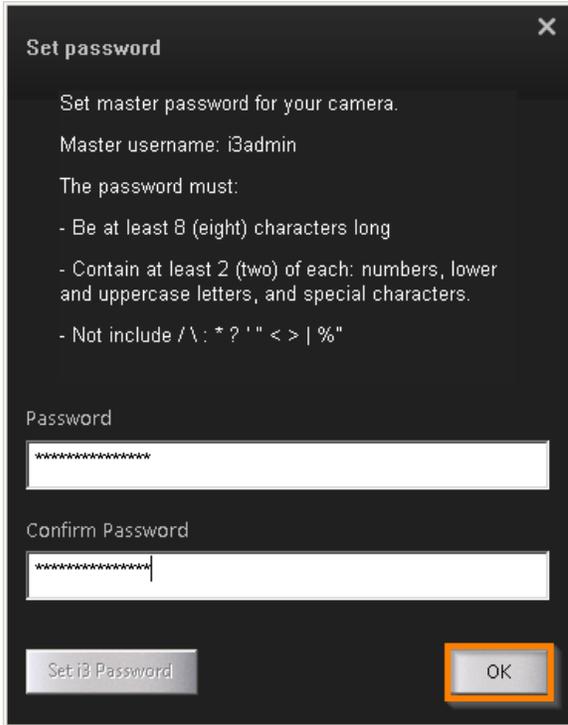

Set password

Set master password for your camera.

Master username: i3admin

The password must:


- Be at least 8 (eight) characters long
- Contain at least 2 (two) of each: numbers, lower and uppercase letters, and special characters.
- Not include / \ : * ? ' " < > | % "

Password

Confirm Password

Set i3 Password **OK**

- The new administrative password will be assigned to camera(s). Wait until the Security status changes to **“active”**.

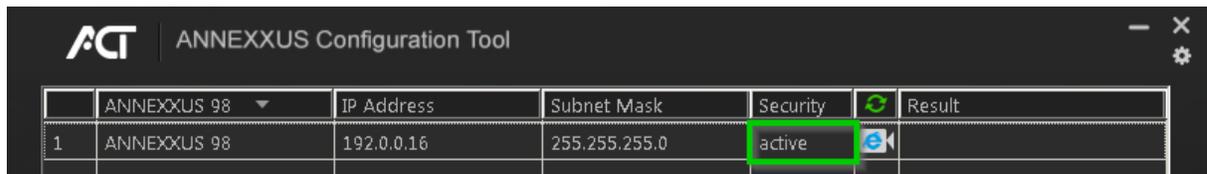

	ANNEXUS 98	IP Address	Subnet Mask	Security	Result
1	ANNEXUS 98	192.0.0.16	255.255.255.0	active	

- Assign new IP address (range) to your active Annexus 78/98 cameras. First, select Annexus 78R/98 camera in the list.
- Uncheck “Default Account” and enter “i3admin” into Username field and the new administrative password (set in Step 6) into Password field.
- Enter the new IP address and Subnet Mask under Device(s) Communication Update

CONTACT

www.i3international.com
 Toll free: 1.866.840.0004
 Tel: 416.261.2266
 Fax: 416.759.7776


CANADA

i3 International Inc.
 780 Birchmount Rd,
 Unit 16, Toronto, ON,
 M1K 5H4


USA

i3 America (Nevada) Inc.
 4450 Witmer Industrial
 Estates, Unit 4, Niagara
 Falls, NY 14305

11. Click **Update**.

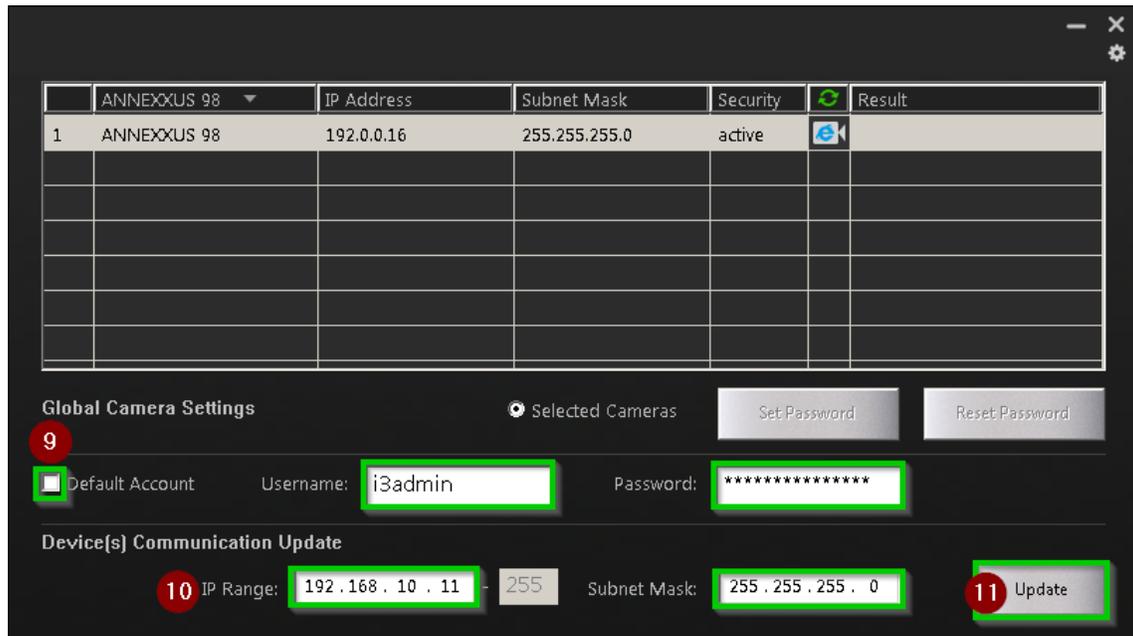

12. Wait a few moments for a “Success” message in the Result field.



13. Repeat Steps 7-11 for all detected Annexus 78R/98 cameras in the ACT until each camera has a *unique* IP address.

14. To confirm your camera’s new IP address, click the IE icon next to each camera. 

In the IE browser, enter administrative Username (**i3admin**) and (new) Password and click LOGIN. Annexus camera interface will be displayed in the Internet Explorer window. You should be able to see the camera image on the screen. If you do not see the camera image on the screen, call i3 International technical support team for troubleshooting tips: 1.877.877.7241

Please contact Technical Support team if you have any questions or issues.

Email: support@i3international.com

Tel.: 1.877.877.7241

Live Chat: <http://i3chat.i3international.com/chat>

i3 International Inc.

Technical Support and Services

*Service charge will be waived for i3 International registered dealers.

CONTACT

www.i3international.com
 Toll free: 1.866.840.0004
 Tel: 416.261.2266
 Fax: 416.759.7776

CANADA

i3 International Inc.
 780 Birchmount Rd,
 Unit 16, Toronto, ON,
 M1K 5H4

USA

i3 America (Nevada) Inc.
 4450 Witmer Industrial
 Estates, Unit 4, Niagara
 Falls, NY 14305