



## Re: M86 camera – disabling the text overlay

The M86 camera has text overlay enabled out of the box, showing the camera name and firmware time in the top left corner of the video recording. You can disable this overlay through the camera's firmware settings or set the correct time to ensure an accurate timestamp.

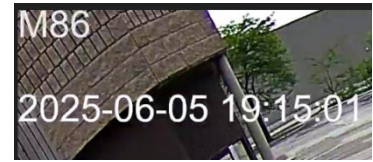


### Disable the Text Overlay


1. Open the **Annexus Configuration Tool (ACT)**.
2. Locate the M86 camera and launch it in an internet browser.

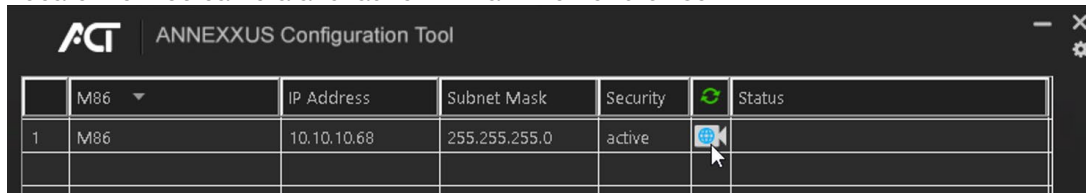


3. Enter your camera credentials, then click **Login**.

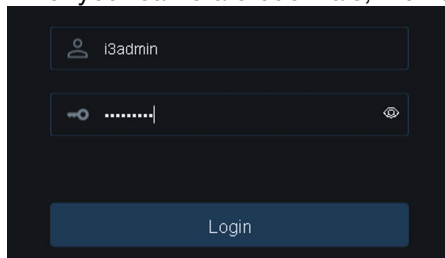

4. Click the **Remote Setup** tab.

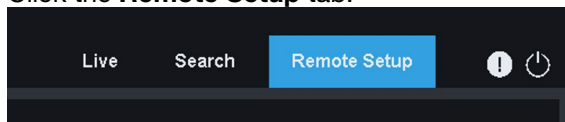


5. To disable the text overlay:
  - Turn off the **Show Name** toggle.
  - Turn off the **Show Time** toggle.
  - Click **Save**.

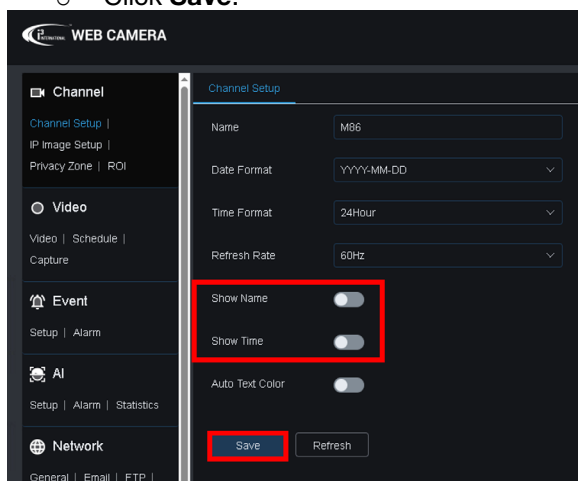


## Set an Accurate Timestamp

If you want to keep the overlay enabled but ensure an accurate time display:

1. In the **Remote Setup** tab, go to **System > General Setup**.

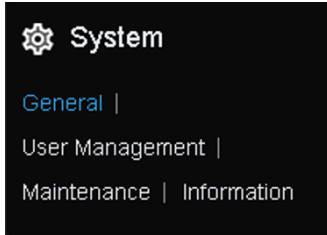

2. Under **Date and Time**, do one of the following:
  - o Manually set the correct date and time
  - o Click **Synchronize Computer Time**.
3. Click **Save**.

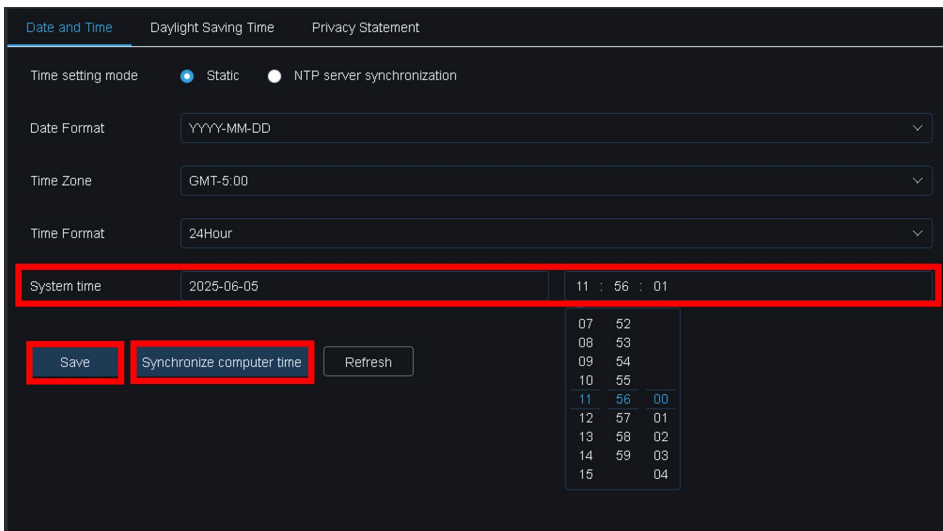A screenshot of a "Date and Time" configuration page. It shows settings for "Time setting mode" (Static selected), "Date Format" (YYYY-MM-DD), "Time Zone" (GMT-5:00), and "Time Format" (24Hour). A table shows the "System time" as 2025-06-05 11:56:01. Below the table are buttons for "Save", "Synchronize computer time", and "Refresh".

System time	2025-06-05	11 : 56 : 01
07	52	
08	53	
09	54	
10	55	
11	56	00
12	57	01
13	58	02
14	59	03
15	04	

Please contact technical support if you have any questions or issues.

Email: [support@i3international.com](mailto:support@i3international.com)

Tel.: 1.877.877.7241

i3 International Inc.

Technical Support and Services