

July 2, 2013

**Re: Using Record Only Server Mode in SRX-Pro Server v.3.0.1**

To all of our customers and partners;


The new release of the SRX-Pro Server v.3.0.1 now offers a **Record Only** server mode, which allows customers the flexibility of hiding the live/search video display on their Server. When set to this mode, the video streams are recorded normally, in accordance with the SRX-Pro Server recording settings; however live or recorded video cannot be viewed from the Server software.

This option may be beneficial for DVRs that are monitored remotely only and not on site. For example, a DVR that is locked in a secure room, while multiple authorized users connect to it remotely to view live or recorded video.

By disabling live and search video display, more hardware resources become available to the SRX-Pro Server for even better and faster performance. Large surveillance systems using multiple megapixel cameras especially can greatly benefit from using this mode.

Follow the instructions below to switch between the Regular and Record Only server modes:

1. Log into the SRX-Pro Server software with administrator privileges.
2. Close the SRX-Pro Server software by pressing **Ctrl + Alt + Shift + F4** simultaneously on your keyboard.
3. Open **Computer** or **My Computer** (depending on the OS version).
4. Open **Local Disk C:** or **Drive C:** or **C drive**.
5. Open **i3Pro Server** folder.
6. Locate and double-click **SRX-ProRecordMode.exe** file. *Recording Mode* dialog window will appear as shown below.

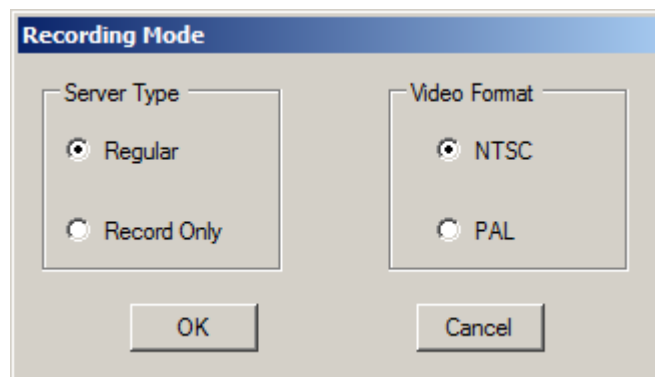

7. Under Server Type,
  - a. Select **Regular** to be able to view live video and record video at the same time. This legacy setting requires more system resources.



INTELLIGENT VIDEO DRIVING PROFIT

- b. Select **Record Only** setting to display SRX-Pro logo instead of live or recorded video. DVR will continue recording normally but without live view display. This setting requires less system resources.
  - c. **NTSC** video format is mainly used in North America.
  - d. **PAL** video format is mainly used in Europe.
8. After selecting your desired options, click **OK**.
  9. Re-launch the SRX-Pro Server software.  
Open the **Start** menu and click the **SRX-Pro Server** icon OR Go to **Start -> All Programs -> Startup -> SRX-Pro Server** icon.

Please contact technical support if you have any questions or issues.

Email: [support@i3international.com](mailto:support@i3international.com)

Tel.: 1.877.877.7241

Live Chat: <http://www.i3international.com/webim/client.php?locale=en>

i3 International Inc.  
Technical Support and Services